

Conventional Vertical Milling Machines

FPK 6.3



SKU : 302341

This versatile tool-milling machine has become an indispensable part of mechanical production in tool and mold making. The compact design, which offers a lot of flexibility and at the same time is very easy to use, has proven itself many times and has been interpreted in a modern way. Servo drives and ball screws make the machine even more powerful and precise. The entire series is ideally suited for the construction of tools and molds in repair shops as well as training and manufacturing departments.

- Vertical and horizontal spindle
- Precise preloaded ball screws on all axes
- Large vertical console and work table
- Automatic feed on all axes with rapid feed
- Infinitely variable main spindle drive
- Extensive accessory package included

TECHNICAL SPECS

WORKING AREA

Table dimensions	450 mm x 850 mm
Vertical table	250 mm x 1190 mm
Table load capacity (max.)	300 kg
Number of T-slots	7 positions
T-slot (width x spacing)	14 mm x 63 mm
T-slots, vertical table (number)	3 positions
T-slots, vertical table (width x spacing)	14 mm x 63 mm

TRAVELS

Travel X-axis	600 mm
Travel Y-axis	450 mm
Travel Z-axis	450 mm

VERTICAL MILLING SPINDLE

Travel pinole	100 mm
Spindle center - column (min.)	165 mm
Spindle center - column (max.)	620 mm

VERTICAL MILLING HEAD

Angular adjustment of vertical head	± 90°
-------------------------------------	-------

RAPID FEED

Rapid feed X-axis	1200 mm/min
Rapid feed Y-axis	1200 mm/min
Rapid feed Z-axis	1200 mm/min

FEED

Work feed X-axis	10 mm/min - 1000 mm/min
Work feed Y-axis	10 mm/min - 1000 mm/min
Work feed Z-axis	10 mm/min - 1000 mm/min

HORIZONTAL MILLING SPINDLE / VERTICAL MILLING SPINDLE



Speed range	40 1/min - 2000 1/min
Spindle mount	SK 40 DIN 2080

DRIVE CAPACITY

Motor rating main drive	5.5 kW
Motor rating coolant pump	0.09 kW

MEASURES AND WEIGHTS

Overall dimensions (length x width x height)	1.6 m x 1.8 m x 2 m
Weight	1750 kg

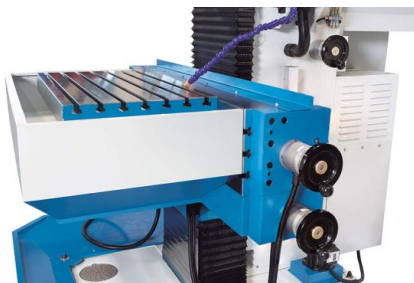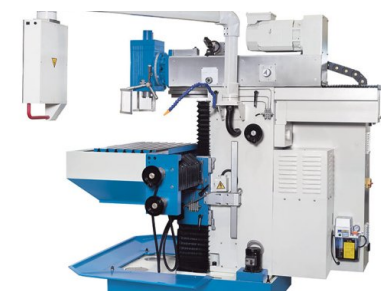

Universal swivel table for FPK 4.3/ FPK 6.3
(253721)

PRODUCT DETAILS

- The Machine column made of premium cast-iron, ensures maximum dynamic rigidity and constant precision
- Precision preloaded ball screws on all axes
- Ergonomically arranged controls and a swivelling control panel plus standard digital position indicator for maximum operator comfort
- Both machines have rigid outer arbors for horizontal milling
- Despite the compact design, this machine features a large work table and large travels for versatile use
- Automatic feed on all axes, infinitely variable and with fast rapid feed
- The vertical cutter head swivels and the quill can be moved manually
- The infinitely variable main spindle drive with counter gear offers a wide speed range with high torque
- Extensive accessory package included
- Central lubrication system is standard equipment
- Price incl. fully assembled 3-axis position indicator

STANDARD EQUIPMENT

Electronic hand-wheels
 3-axis position indicator X.Pos 3.2
 Central lubrication
 Reducing sleeves MT1, MT2, MT3
 Collet chuck with collets
 Horizontal milling arbor 16mm
 Horizontal milling arbor 22mm
 Horizontal milling arbor, 27 mm
 Horizontal milling arbor 32mm
 Counterholder for horizontal milling
 Chip tray
 Coolant system
 Work lamp
 pull rod (M16) for horizontal / vertical spindle
 levelling pads and bolts
 Operating tools
 Operator manual

OPTIONAL EQUIPMENT

- Universal swivel table for FPK 4.3/ FPK 6.3, SKU : 253721



KNUTH on YouTube

Information to the point

On our YouTube channel you can find videos for nearly all machines from our program. We show the machines from current deliveries and you get an impression of the handling, the processing quality and the machining performance.

**Are you interested in a machine for which you cannot find a current video?
Please feel free to contact us!**